


CAR Vision System Outdoor mounted Camera

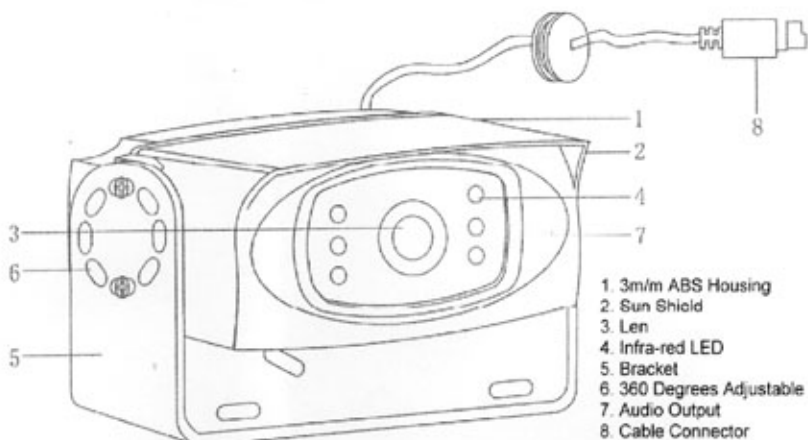

SPECIFICATIONS

Item	B/W CA -1206B	COLOR CA-1206C
Image Sensor	1/3" B/W CCD	1/4" COLOR CCD
Picture Elements	EIA: 510(H) x 492(V) CCIR: 500(H) x 582(V)	NTSC: 510(H) x 492(V) PAL: 500(H) x 582(V)
Scanning System	525 TV Lines 2:1 Interlace 625 TV Lines 2:1 Interlace	525 TV Lines 2:1 Interlace 625 TV Lines 2:1 Interlace
Min. Illumination	0Lux / 0M~3M	1.0Lux / F1.2
Electronic shutter	1/60(1/50)~1/100,000	
Sync. System	Internal	
Scanning Frequency	EIA: 15,750Hz CCIR: 15,625 Hz	NTSC: 15,750Hz PAL: 15,625 Hz
Horizontal Resolution	420TV Lines	330TV Lines
S/N Ratio	45dB or more (AGC Off)	
Video Output Signal	VBS 1.0Vp-p/75Ω	
Shock Resistance	10G	
Lens	Angular Diagonal 120° F=3.0mm ±5%	
Power Supply	DC12V±1V	
Power Consumption	Max 140mA	200mA
Audio Output	2V / 600Ω	
Operating Temp	-20°C to 55°C	
Weight	280g	
Dimension	105 x 65 x 65 (W x H x D) mm	